

INSTRUCTION


Storage and transportation
of KAN-therm system



20181008-V1-2

It is allowed to bundle pipes using fixing strips or stretch foil.

Store and transport the pipes horizontally.

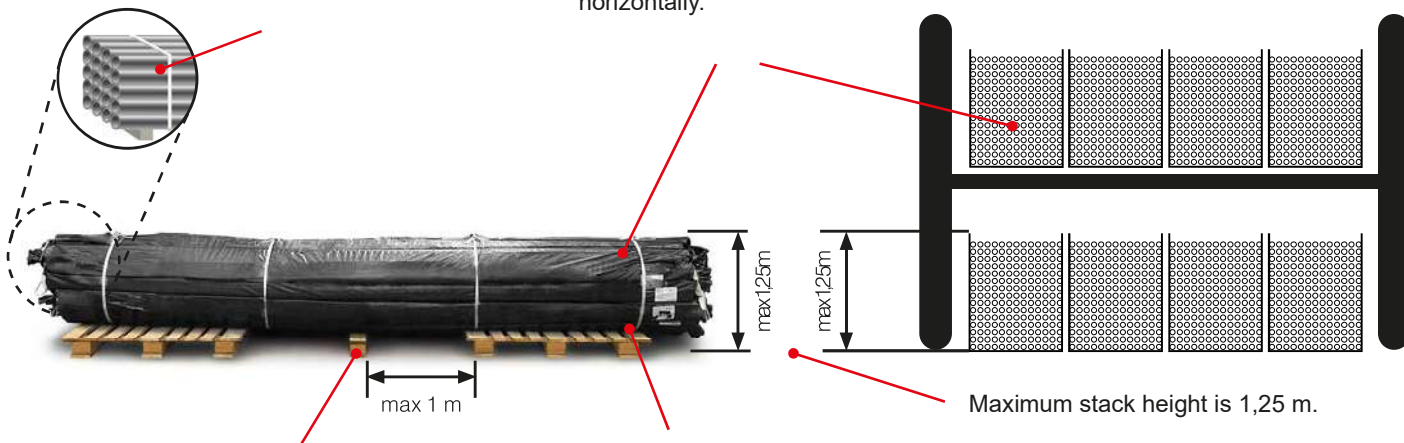


Use supports to avoid deflection. Spacing of pipes' supports shall not exceed 1 meter.

Pipes in original opaque bags can be stored outdoor.

When stacking cartons on pallets, make sure they are packed tightly and tie stacked from layer to layer.

Maximum pallet height is 2,4 m, provided that cardboard layer pads and carton corners are used.

It is recommended to stack boxes on pallets up to 1,6 m.

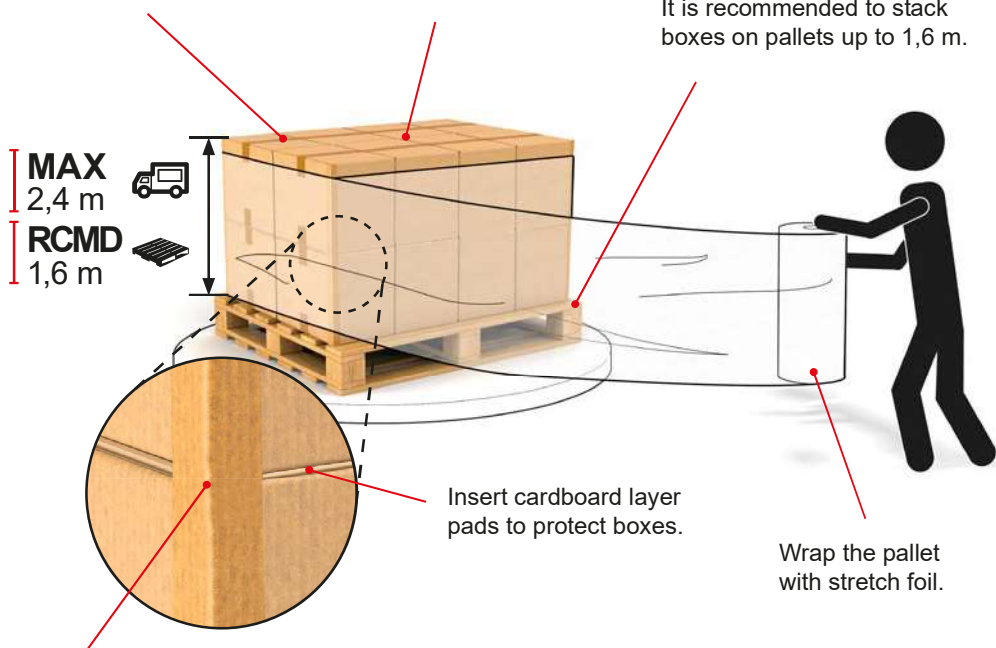

Use carton corners to stabilize boxes and protect them from damage.

Insert cardboard layer pads to protect boxes.

Wrap the pallet with stretch foil.

INSTRUCTION

Storage and transportation
of KAN-therm system



Do not place near
intense heat sources.



Protect pipes from
external impacts, pay
special attention to
pipe ends.
When loading, pipes
may not be thrown,
dropped or dragged.



Do not expose pipes
and fittings to direct
sunlight.



Protect tubes and
fittings from chemical
substances such as
organic solvents,
paints or chlorine
fumes.



Pipes and fittings
must be kept
clean. Protect from
contamination -
especially with oil and
grease.



Special care and
caution should be
taken when loading
and transporting at
temperatures below 0°C.



Store preferably in
undamaged factory
packaging.

Storage and transportation rules apply to all products delivered to and shipped from KAN Sp. z o.o.

⚠ Violation of the rules will entail the rejection of delivery or complaint.